

pDLNA

Installation, Configuration and Debugging Guide

Stefan Heumader

version 0.70.1

January 6, 2015

Contents

1	Introduction	5
2	Requirements	6
2.1	Perl modules	6
2.2	Third party software	10
2.2.1	FFmpeg	10
3	Installing on UNIX and Linux	11
3.1	Install prerequisites	11
3.1.1	CentOS 6	11
3.1.2	Debian GNU/Linux 7	12
3.1.3	FreeBSD 9	12
3.2	Installing via git	13
3.2.1	Cloning the git repository	13
3.2.2	Finalizing the installation	14
3.2.3	Updating pDLNA	16
3.3	Installing the latest release	16
3.3.1	Downloading latest release	16
3.3.2	Installation	16
3.3.3	Updating pDLNA	20
4	Installing on Windows	23
5	Installing on MacOS X	24
6	Configuration	25
6.1	Global parameters	25
6.1.1	FriendlyName	25
6.1.2	Check4Updates	26
6.1.3	Check4UpdatesNotification	26
6.1.4	EnableGeneralStatistics	27
6.1.5	EnableDBStatistics (EXPERIMENTAL)	27
6.1.6	PIDFile	27
6.1.7	TempDir	27
6.2	Database configuration	28
6.2.1	DatabaseType	28
6.2.2	DatabaseName	29
6.2.3	DatabaseUsername and DatabasePassword	30
6.3	Network configuration	30

6.3.1	ListenInterface	30
6.3.2	ListenIPAddress	31
6.3.3	HTTPPort	31
6.3.4	AllowedClients	31
6.4	SSDP configuration	32
6.4.1	CacheControl	32
6.4.2	UUID	32
6.5	DLNA configuration	33
6.5.1	BufferSize	33
6.5.2	SpecificViews (EXPERIMENTAL)	33
6.5.3	EnableImageThumbnails	33
6.5.4	EnableVideoThumbnails	33
6.5.5	LowResourceMode	34
6.5.6	FFmpegBinaryPath	34
6.6	Logging	34
6.6.1	LogFile	34
6.6.2	LogFileMaxSize	35
6.6.3	LogFileRotation	35
6.6.4	LogLevel	35
6.6.5	LogCategory	36
6.6.6	DateFormat	36
6.7	Media Configuration	37
6.7.1	RescanMediaInterval	37
6.7.2	Directory	37
6.7.3	External media items and Streams	39
6.8	Transcoding Profiles	39
7	WebUI	40
7.1	Configured media	40
7.2	Connected devices	41
7.3	Information	42
8	Pre-installed virtual machines	46
8.1	General information	47
8.1.1	Included media files	47
8.2	Specific Information	48
8.2.1	CentOS 6	49
8.2.2	Debian GNU/Linux 7	50
8.2.3	FreeBSD 9	51
9	Debugging and reporting problems	53
9.1	Debugging	53
9.1.1	My device is not able to discover <i>pDLNA</i>	54
9.1.2	My media directories are not read correctly	54
9.1.3	My device is not able to list the directories/items shared by <i>pDLNA</i>	55
9.1.4	<i>pDLNA</i> is not able to stream media items to my device	55
9.2	Reporting problems	55

10 Known Issues	56
10.1 PostgreSQL: NOTICE messages when initializing database . . .	56
10.1.1 Description	56
10.1.2 Workaround	57
10.2 FreeBSD: initscript unable to completely shut down pDLNA . . .	57
10.2.1 Description	57
10.2.2 Workaround	57
11 Fixed Issues	58
11.1 DirectoryListings not working when mandatory data fields not defined	58
11.1.1 Description	58
11.1.2 Workaround	58
11.2 Movie::Info is still used by PDLNA::Media	58
11.2.1 Description	58
11.2.2 Workaround	58
11.3 parsing problem if media file name contains special regex charac- ters like '(', ')', ' ' or others	59
11.3.1 Description	59
11.3.2 Workaround	59
11.4 Use of uninitialized value \$request_line in string ne at /PDL- NA/HTTPServer.pm line xxx.	59
11.4.1 Description	59
11.4.2 Workaround	59
11.5 AllowedClients auto detection on FreeBSD is defect	60
11.5.1 Description	60
11.5.2 Workaround	60

Chapter 1

Introduction

This document gives detailed information and instructions regarding the requirements, the installation and the configuration of *pDLNA* in its version 0.70.1.

The following chapter 2 gives an overview regarding the necessary requirements to run *pDLNA*. The chapters 3, 4 and 5 describe the installation steps on various operating systems and chapter 6 describes all the possible configuration parameters.

While chapter 7 gives a short introduction into the functionality of the WebUI, chapter 8 gives a description about the pre-installed virtual machine images, which are available to download.

Chapter 9 gives an overview regarding debugging or reporting problems of *pDLNA* on different operating systems.

In the end of this document, chapter 10 contains a list of known issues, which affect this version of *pDLNA* and possible workarounds, to fix the issue temporarily. And chapter 11 contains a list of issues, which have been fixed by this or prior versions of *pDLNA*.

If you have any questions at all, please do not hesitate to contact me.

Chapter 2

Requirements

This chapter gives an overview regarding the supported Perl versions, necessary Perl modules and additional/optional third party software, which are required for specific functionalities of *pDLNA*.

pDLNA in its current version (0.70.1) has been tested with the in table 2.1 listed UNIX derivates or Linux distributions and their Perl version. Your installed Perl version can be determined by executing:

```
pdlna@mediaserver:~$ perl -v
```

UNIX DERIVATE	PERL VERSION
CentOS 6	5.10
Debian GNU/Linux 7 (wheezy)	5.14
FreeBSD 9	5.16

Table 2.1: Tested UNIX derivates or Linux distributions and their Perl version

NOTE: *pDLNA* probably works with any other Perl version or Linux distribution. Please feel free to contact me about your installation environment.

2.1 Perl modules

There are three tables, which give an overview about the necessary Perl modules regarding a specific UNIX derivate or Linux distribution. While table 2.2 lists the CentOS 6 (and its variants) package names, table 2.3 lists the Debian GNU/Linux 7 (and its variants) package names of these modules and finally table 2.4 names the FreeBSD 9 port names and their category.

If your favorite UNIX derivate or Linux distribution is not one of those, you will need make sure, that these Perl modules are installed anyway.

PERL MODULE NAME	CENTOS 6 PACKAGE NAME
Audio::FLAC::Header	
Audio::Wav	
Audio::WMA	
Config	
Config::ApacheFormat	
Data::Dumper	
Date::Format	
DBD::mysql	perl-DBD-MySQL
DBD::Pg	perl-DBD-Pg
DBD::SQLite	perl-DBD-SQLite
DBI	perl-DBI
Digest::MD5	
Digest::SHA	perl-Digest-SHA
Fcntl	
File::Basename	
File::Glob	
File::MimeInfo	
GD	perl-GD
GD::Graph::area	perl-GDGraph
Getopt::Long::Descriptive	
HTML::Entities	
Image::Info	perl-Image-Info
IO::Interface	
IO::Select	
IO::Socket	
IO::Socket::INET	
IO::Socket::Multicast	
LWP::UserAgent	
MP3::Info	
MP4::Info	
Net::IP	perl-Net-IP
Net::Netmask	
Ogg::Vorbis::Header::PurePerl	
POSIX	
Proc::ProcessTable	
SOAP::Lite	perl-SOAP-Lite
Socket	
Sys::Hostname	
Sys::Syslog	
threads	
threads::shared	
Time::HiRes	perl-Time-HiRes
URI::Split	
XML::Simple	perl-XML-Simple

Table 2.2: Necessary Perl modules on CentOS 6

PERL MODULE NAME	DEBIAN 7 PACKAGE NAME
Audio::FLAC::Header	libaudio-flac-header-perl
Audio::Wav	libaudio-wav-perl
Audio::WMA	libaudio-wma-perl
Config	
Config::ApacheFormat	libconfig-apacheformat-perl
Data::Dumper	
Date::Format	
DBD::mysql	libdbd-mysql-perl
DBD::Pg	libdbd-pg-perl
DBD::SQLite	libdbd-sqlite3-perl
DBI	libdbi-perl
Digest::MD5	libdigest-md5-perl
Digest::SHA	libdigest-sha-perl
Fcntl	
File::Basename	
File::Glob	
File::MimeInfo	libfile-mimeinfo-perl
GD	libgd-gd2-perl
GD::Graph::area	libgd-graph-perl
Getopt::Long::Descriptive	libgetopt-long-descriptive-perl
HTML::Entities	libhtml-parser-perl
Image::Info	libimage-info-perl
IO::Interface::Simple	libio-interface-perl
IO::Select	
IO::Socket	
IO::Socket::INET	
IO::Socket::Multicast	libio-socket-multicast-perl
LWP::UserAgent	
MP3::Info	libmp3-info-perl
MP4::Info	libmp4-info-perl
Net::IP	libnet-ip-perl
Net::Netmask	libnet-netmask-perl
Ogg::Vorbis::Header::PurePerl	libogg-vorbis-header-pureperl-perl
POSIX	
Proc::ProcessTable	libproc-processtable-perl
SOAP::Lite	libsoap-lite-perl
Socket	
Sys::Hostname	
Sys::Syslog	libsys-syslog-perl
threads	
threads::shared	
Time::HiRes	
URI::Split	
XML::Simple	libxml-simple-perl

Table 2.3: Necessary Perl modules on Debian GNU/Linux 7

PERL MODULE NAME	FREEBSD 9 PORT NAME
Audio::FLAC::Header	audio/p5-Audio-FLAC-Header
Audio::Wav	audio/p5-Audio-Wav
Audio::WMA	audio/p5-Audio-WMA
Config	
Config::ApacheFormat	devel/p5-Config-ApacheFormat
Data::Dumper	devel/p5-Data-Dumper
Date::Format	
DBD::mysql	databases/p5-DBD-mysql
DBD::Pg	databases/p5-DBD-Pg
DBD::SQLite	databases/p5-DBD-SQLite
DBI	databases/p5-DBI
Digest::MD5	
Digest::SHA1	security/p5-Digest-SHA1
Fcntl	
File::Basename	
File::Glob	
File::MimeInfo	devel/p5-File-MimeInfo
GD	graphics/p5-GD
GD::Graph::area	graphics/p5-GD-Graph
Getopt::Long::Descriptive	devel/p5-Getopt-Long-Descriptive
HTML::Entities	
Image::Info	graphics/p5-Image-Info
IO::Interface	net/p5-IO-Interface
IO::Select	
IO::Socket	
IO::Socket::INET	
IO::Socket::Multicast	net/p5-IO-Socket-Multicast
LWP::UserAgent	
MP3::Info	audio/p5-MP3-Info
MP4::Info	multimedia/p5-MP4-Info
Net::IP	net-mgmt/p5-Net-IP
Net::Netmask	net-mgmt/p5-Net-Netmask
Ogg::Vorbis::Header::PurePerl	audio/p5-Ogg-Vorbis-Header-PurePerl
POSIX	
Proc::ProcessTable	devel/p5-Proc-ProcessTable
SOAP::Lite	net/p5-SOAP-Lite
Socket	net/p5-Socket
Sys::Hostname	
Sys::Syslog	sysutils/p5-Sys-Syslog
threads	
threads::shared	
Time::HiRes	devel/p5-Time-HiRes
URI::Split	
XML::Simple	textproc/p5-XML-Simple

Table 2.4: Necessary Perl modules on FreeBSD 9

As already mentioned you need to install these Perl modules. You are able to install these modules using *CPAN* (*Comprehensive Perl Archive Network*)¹ or even via the package management of your favourite Linux distribution.

For example, installing the *XML::Simple* Perl module can be installed via *CPAN* by using the following command

```
pdlna@mediaserver:~$ sudo cpan
cpan[1]> install XML::Simple
```

or by executing the following command

```
pdlna@mediaserver:~$ sudo apt-get install libxml-simple-perl
```

on the Debian GNU/Linux distribution and its variants.

For Perl modules without a package provided by your UNIX derivate or Linux distrubution, you need to install it via *CPAN*.

2.2 Third party software

pDLNA requires for specific functionalities third party software, which is open source software.

2.2.1 FFmpeg

IMPORTANT NOTE: Transcoding is currently not available in *pDLNA* in version 0.70.1. If you would like to use Transcoding, please use *pDLNA* in version 0.64.3. Transcoding will be readded to *pDLNA* in the future.

The FFmpeg's source code or binaries can be obtained from the project's official website ffmpeg.org or can be installed via the package management of your favorite UNIX derivate or Linux distrubution. The following command will install the FFmpeg package on the Debian GNU/Linux distribution and its variants.

```
pdlna@mediaserver:~$ sudo apt-get install ffmpeg
```

The official website of FFmpeg does also provide information, where to get binaries for your Windows operating system.

¹cpan.perl.org/

Chapter 3

Installing on UNIX and Linux

This chapter gives an overview about the different methods for installing *pDLNA* on your favorite UNIX derivate or Linux distrubution. The first section gives an overview about installing the necessary prerequisites for various UNIX derivates or Linux distrubutions. The second section describes the installation steps via the official `git` repository, while the third section describes installing *pDLNA* from a packed tarball.

3.1 Install prerequisites

IMPORTANT NOTE: The following described steps to install the prerequisites for *pDLNA* do not include installing the necessary Perl modules for the provided `install.pl` script. This script requires the `File::Copy::Recursive` and `Getopt::Long::Descriptive` Perl modules additionally. These Perl modules are included in the repository from the Debian GNU/Linux distribution and its variants by the name `libfile-copy-recursive-perl` and `libgetopt-long-descriptive-perl`.

IMPORTANT NOTE: In this chapter `sudo` is used for commands, which require administrative rights to fulfill certain tasks. If you do not like or at least do not want to use `sudo`, please ensure to execute the listed commands with an adminstrative user like `root`.

3.1.1 CentOS 6

On a fresh CentOS 6 (mininal) installation, the following command installs necessary CentOS packages and some necessary Perl Modules from the official repository:

```
pdlna@mediaserver:~$ sudo yum install bind-utils cpan make gcc libogg-devel
libogg libvorbis libvorbis-devel vorbis-tools perl-DBD-MySQL perl-DBD-Pg
perl-DBD-SQLite perl-DBI perl-Digest-SHA perl-GD perl-GDGraph
perl-Image-Info perl-Net-IP perl-SOAP-Lite perl-Time-HiRes perl-XML-Simple
perl-YAML
```

Afterwards you still need to install a lot of Perl modules via *CPAN* itself, since they are not included in the official repository:

```
pdlna@mediaserver:~$ sudo cpan
cpan[1]> install Getopt::Long::Descriptive
cpan[2]> install Audio::FLAC::Header Audio::Wav Audio::WMA
cpan[3]> install Config::ApacheFormat
cpan[4]> install Date::Format File::MimeInfo
cpan[5]> install IO::Interface IO::Socket::Multicast
cpan[6]> install MP3::Info MP4::Info
cpan[7]> install Net::Netmask
cpan[8]> install Ogg::Vorbis::Header::PurePerl
cpan[9]> install Proc::ProcessTable
```

IMPORTANT NOTE: In the default repositories of CentOS, there is no package for FFmpeg. Either install FFmpeg manually or run *pDLNA* in *LowResourceMode* (see section 6.5.5 for detailed information).

3.1.2 Debian GNU/Linux 7

On a fresh installed Debian GNU/Linux 7 operating system, you are able to execute the following command to install necessary Debian GNU/Linux packages and all the necessary Perl modules from the Debian repository:

```
pdlna@mediaserver:~$ sudo apt-get install ffmpeg libaudio-flac-header-perl
libaudio-wav-perl libaudio-wma-perl libconfig-apacheformat-perl
libdbd-mysql-perl libdbd-pg-perl libdbd-sqlite3-perl libdbi-perl
libdigest-md5-perl libdigest-sha-perl libfile-mimeinfo-perl libgd-gd2-perl
libgd-graph-perl libgetopt-long-descriptive-perl libhtml-parser-perl
libimage-info-perl libio-interface-perl libio-socket-multicast-perl
libmp3-info-perl libmp4-info-perl libnet-ip-perl libnet-netmask-perl
libogg-vorbis-header-pureperl-perl libproc-processtable-perl
libsoap-lite-perl libsys-syslog-perl libxml-simple-perl
```

3.1.3 FreeBSD 9

Since FreeBSD 9 brings *portsnap*, which is a fast and user-friendly tool for retrieving the *Ports Collection*, installing required software, which is part of the *Ports Collection* is easy. The following three commands will download all *Ports*, extract them and will also update the *Ports* tree. At this point you might not have *sudo* installed, so please execute these commands with administrative rights.

```
[root@mediaserver ~]$ portsnap fetch
[root@mediaserver ~]$ portsnap extract
[root@mediaserver ~]$ portsnap update
```

IMPORTANT NOTE: Prior versions of FreeBSD 9.2^a are no longer supported. Please use *freebsd-update* to upgrade your FreeBSD installation.

^a<http://www.freebsd.org/security/unsupported.html>

IMPORTANT NOTE: FreeBSD 9 might come with a **non-threaded** Perl version. In this case, please ensure to deinstall the running Perl version and recompile it with threads. This can be done for version 5.12 by the command `[root@ms /usr/ports/lang/perl5.12/]$ make WITH_THREADS=yes`.

Afterwards, you will be able to look, if there is already a *Port* for the required software available, by simply visiting <http://www.freebsd.org/cgi/ports.cgi>. If the *Port* is available, it will list the category and its name. Afterwards you are able to compile and install the software. For instance, if you would like to install `git`, which is available in the category `devel`, this can be done by the following command:

```
[root@mediaserver ~]$ cd /usr/ports/devel/git
[root@mediaserver /usr/ports/devel/git]$ sudo make install clean
```

To install all required Perl modules, which are included in the *Ports Collection* (see table 2.4), follow the two steps listed above for compiling and installing. Additionally, you are able to install the Perl modules `File::Copy::Recursive` and `Getopt::Long::Descriptive` (necessary for the `install.pl` script) which are named `p5-File-Copy-Recursive` and `p5-Getopt-Long-Descriptive`. Both modules are member of the `devel` category.

Afterwards you still need to install some Perl modules via *CPAN* itself, since they are not included in the *Ports Collection*:

```
[pdlna@mediaserver ~]$ sudo cpan
cpan[1]> install Date::Format
cpan[2]> install HTML::Entities
cpan[3]> install LWP::UserAgent
cpan[4]> install URI::Split
```

If you would like *pDLNA* to use `FFmpeg` (see section 2.2.1), you are also able to install them via the *Ports Collection* by the following commands:

```
[pdlna@mediaserver ~]$ cd /usr/ports/multimedia/ffmpeg
[pdlna@mediaserver /usr/ports/multimedia/ffmpeg]$ sudo make install clean
```

3.2 Installing via git

Installing *pDLNA* via a `git clone` is a simple way to install *pDLNA* und keep it up to date. `git` is a distributed revision control system and is developed by Linus Torvalds. The official `git` repository is hosted on GitHub (github.com/geuma/pDLNA/), which is a web-based hosting service for software development projects.

3.2.1 Cloning the git repository

At first the `git` software must be installed on the computer, *pDLNA* should be run at. The `git` source code can be obtained from the project's official website git-scm.com/ or can be installed via the package management of your favorite Linux distribution. The following command will install the `git` package on the Debian GNU/Linux distribution and its variants.

```
pdlna@mediaserver:~$ sudo apt-get install git
```

After installing `git` you need to clone the repository by executing the following command:

```
pdlna@mediaserver:~$ git clone git://github.com/geuma/pDLNA.git
```

In the end, a directory named *pDLNA* has been created, which should look like the following directory listing:

```
pdlna@mediaserver:~/pDLNA$ ls -lah
total 104K
drwxr-xr-x 6 pdlna pdlna 4.0K Jun 7 17:07 .
drwxr-xr-x 4 pdlna pdlna 4.0K Jan 11 13:28 ..
-rwxr-xr-x 1 pdlna pdlna 19K Jan 10 19:21 CHANGELOG
drwxr-xr-x 3 pdlna pdlna 4.0K Jan 9 18:29 etc
drwxr-xr-x 2 pdlna pdlna 4.0K Nov 23 2013 external_programs
drwxr-xr-x 8 pdlna pdlna 4.0K Jun 7 17:07 .git
-rwxr-xr-x 1 pdlna pdlna 1.2K Jan 9 18:29 INSTALL
-rwxr-xr-x 1 pdlna pdlna 6.7K Jan 12 12:44 install.pl
-rwxr-xr-x 1 pdlna pdlna 35K Nov 23 2013 LICENSE
-rwxr-xr-x 1 pdlna pdlna 845 Jan 9 18:29 README
-rwxr-xr-x 1 pdlna pdlna 1.4K Nov 23 2013 TODO
drwxr-xr-x 4 pdlna pdlna 4.0K Jan 9 18:29 usr
-rwxr-xr-x 1 pdlna pdlna 21 Jan 9 18:29 VERSION
```

3.2.2 Finalizing the installation

The easiest way to finalize the installation is to copy the default configuration file from the `git clone` to the `/etc/` directory by executing the following commands. For copying the configuration file you might need superuser rights.

```
pdlna@mediaserver:~$ cd ~/pDLNA/
pdlna@mediaserver:~/pDLNA$ sudo cp etc/pdlna.conf /etc/
```

Additionally you should copy the sample initscript from the `git clone` to the `/etc/init.d/` directory and setting the execute bit by executing the following commands. This step might also require superuser rights.

```
pdlna@mediaserver:~$ cd ~/pDLNA/
pdlna@mediaserver:~/pDLNA$ sudo cp etc/init.d/pdlna /etc/init.d/
pdlna@mediaserver:~/pDLNA$ sudo chmod +x /etc/init.d/pdlna
```

In the end you need to change the `DIR` variable in the initscript (line 20) by editing the file `/etc/init.d/pdlna` with your favourite editor like *vim*, *nano* or whatever you like. The following snippet shows you an example command:

```
pdlna@mediaserver:~$ sudo vim /etc/init.d/pdlna
```

After opening the file, jump to line 20 and edit the path for the *DIR* variable to the path, where the *pDLNA.pl* is stored. If you have cloned the `git` repository to `/home/pdlna/pDLNA/` you need to set the variable to the following value:

```
DIR="/home/pdlna/pDLNA/usr/sbin/"
```

Additionally you need to check for the dependencies (see chapter 2) you are able to run the `install.pl` script with the `(-c` or `--checkrequirements)` parameter, which is stored in the git repository:

```
pdlna@mediaserver:~/pDLNA$ perl install.pl -c
```

```
-----
Step 1:
Testing for necessary Perl Modules ...
-----
ok 1 - use Audio::FLAC::Header;
ok 2 - use Audio::Wav;
ok 3 - use Audio::WMA;
ok 4 - use Config;
ok 5 - use Config::ApacheFormat;
ok 6 - use Data::Dumper;
ok 7 - use Date::Format;
ok 8 - use DBD::mysql;
ok 9 - use DBD::Pg;
ok 10 - use DBD::SQLite;
ok 11 - use DBI;
ok 12 - use Digest::MD5;
ok 13 - use Digest::SHA;
ok 14 - use Fcntl;
ok 15 - use File::Basename;
ok 16 - use File::Glob;
ok 17 - use File::MimeInfo;
ok 18 - use GD;
ok 19 - use GD::Graph::area;
ok 20 - use Getopt::Long::Descriptive;
ok 21 - use HTML::Entities;
ok 22 - use Image::Info;
ok 23 - use IO::Interface::Simple;
ok 24 - use IO::Select;
ok 25 - use IO::Socket;
ok 26 - use IO::Socket::INET;
ok 27 - use IO::Socket::Multicast;
ok 28 - use LWP::UserAgent;
ok 29 - use MP3::Info;
ok 30 - use MP4::Info;
ok 31 - use Net::IP;
ok 32 - use Net::Netmask;
ok 33 - use Ogg::Vorbis::Header::PurePerl;
ok 34 - use POSIX;
ok 35 - use Proc::ProcessTable;
ok 36 - use SOAP::Lite;
ok 37 - use Socket;
ok 38 - use Sys::Hostname;
ok 39 - use Sys::Syslog;
ok 40 - use threads;
ok 41 - use threads::shared;
ok 42 - use Time::HiRes;
ok 43 - use URI::Split;
ok 44 - use XML::Simple;
1..44
```

The output above shows the executed `install.pl` script with its output. As long as all of these checks return `ok`, all necessary requirements are fulfilled.

IMPORTANT NOTE: The checking will not include checking if `FFmpeg` is installed. For detailed information regarding the usage of `FFmpeg` see section 2.2.1.

After the initial configuration (see chapter 6), you are able to start *pDLNA* by executing the following command:

```
pdlna@mediaserver:~$ sudo /etc/init.d/pdlna start
```

3.2.3 Updating pDLNA

Because of the `git clone` updating *pDLNA* is pretty easy if there have not been any changes to your `git clone`. By executing the following commands

```
pdlna@mediaserver:~$ cd pDLNA/  
pdlna@mediaserver:~/pDLNA$ git pull
```

pDLNA will be updated to the latest version, which is currently pushed to the `git` repository. After checking for requirements by executing `install.pl -c` and restarting *pDLNA* via

```
pdlna@mediaserver:~$ sudo /etc/init.d/pdlna restart
```

the new version is going to be started.

IMPORTANT NOTE: In some cases it might be necessary to follow the steps from installing *pDLNA* via a `git clone` again.

3.3 Installing the latest release

Installing the latest release of *pDLNA* is the simplest way to install *pDLNA*. Every release of *pDLNA* will be packaged as a tarball and available via the changelog section on www.pdlna.org/cgi-bin/index.pl?menu=changelog or can be downloaded directly via <http://www.pdlna.org/cgi-bin/index.pl?menu=download&type=release&version=latest>.

3.3.1 Downloading latest release

The latest release of *pDLNA* can be downloaded via <http://www.pdlna.org/cgi-bin/index.pl?menu=download&type=release&version=latest>. The changelog section (www.pdlna.org/cgi-bin/index.pl?menu=changelog) gives detailed information about all releases.

The following snippet shows the command to download the latest version using `wget`:

```
pdlna@mediaserver:~$ cd /tmp/  
pdlna@mediaserver:/tmp$ wget \  
"http://www.pdlna.org/cgi-bin/index.pl?menu=download&type=rel&version=lat" \  
-O pDLNA.tgz
```

3.3.2 Installation

After downloading the latest version of *pDLNA* to the `/tmp` directory, you should extract the tarball and change to the extracted directory by executing the following commands:

```
pdlna@mediaserver:/tmp$ tar xzf pDLNA.tgz
pdlna@mediaserver:/tmp$ cd pDLNA
```

In this directory, there is a script called `install.pl`, which supports checking for requirements (`-c` or `--checkrequirements`), installing (`-i` or `--install`) and updating the application (`-u` or `--update`). Additionally the help function (`-h` or `--help`) prints out more detailed information.

So the first step to install *pDLNA* should be to run the installation script to check for the necessary requirements (see chapter 2) by executing the following command:

```
pdlna@mediaserver:/tmp/pDLNA$ perl install.pl -c
```

```
-----
Step 1:
Testing for necessary Perl Modules ...
-----
ok 1 - use Audio::FLAC::Header;
ok 2 - use Audio::Wav;
ok 3 - use Audio::WMA;
ok 4 - use Config;
ok 5 - use Config::ApacheFormat;
ok 6 - use Data::Dumper;
ok 7 - use Date::Format;
ok 8 - use DBD::mysql;
ok 9 - use DBD::Pg;
ok 10 - use DBD::SQLite;
ok 11 - use DBI;
ok 12 - use Digest::MD5;
ok 13 - use Digest::SHA;
ok 14 - use Fcntl;
ok 15 - use File::Basename;
ok 16 - use File::Glob;
ok 17 - use File::MimeInfo;
ok 18 - use GD;
ok 19 - use GD::Graph::area;
ok 20 - use Getopt::Long::Descriptive;
ok 21 - use HTML::Entities;
ok 22 - use Image::Info;
ok 23 - use IO::Interface::Simple;
ok 24 - use IO::Select;
ok 25 - use IO::Socket;
ok 26 - use IO::Socket::INET;
ok 27 - use IO::Socket::Multicast;
ok 28 - use LWP::UserAgent;
ok 29 - use MP3::Info;
ok 30 - use MP4::Info;
ok 31 - use Net::IP;
ok 32 - use Net::Netmask;
ok 33 - use Ogg::Vorbis::Header::PurePerl;
ok 34 - use POSIX;
ok 35 - use Proc::ProcessTable;
ok 36 - use SOAP::Lite;
ok 37 - use Socket;
ok 38 - use Sys::Hostname;
ok 39 - use Sys::Syslog;
ok 40 - use threads;
ok 41 - use threads::shared;
ok 42 - use Time::HiRes;
ok 43 - use URI::Split;
ok 44 - use XML::Simple;
1..44
```

The output above shows the different tests and their results, which were performed by the installation script. As long as all of these checks return `ok`, all necessary requirements are fulfilled. For a complete overview regarding the requirements please see chapter 2.

IMPORTANT NOTE: The checking will not include checking if `FFmpeg` is installed. For detailed information regarding the usage of `FFmpeg` see section 2.2.1.

When all requirements have been fixed and installed, you are able to rerun the installation script by executing the installation script with the `--install` parameter. By default, the script will install *pDLNA* to the `/opt` directory, which can be changed by setting the `--prefix=/path/to/your/directory` parameter. The following output shows the installation process, which is started by checking the requirements for *pDLNA*. While step 2 is checking for two more Perl modules for the installation itself, step 3 installs the necessary files from *pDLNA* to the specified directory and step 4 modifies the installed files for the installation specific parts. In the end, step 5 verifies the installation.

```
pdlna@mediaserver:/tmp/pDLNA$ sudo perl install.pl -i
```

```
-----
```

```
Step 1:
```

```
Testing for necessary Perl Modules ...
```

```
-----
```

```
ok 1 - use Audio::FLAC::Header;
```

```
ok 2 - use Audio::Wav;
```

```
ok 3 - use Audio::WMA;
```

```
ok 4 - use Config;
```

```
ok 5 - use Config::ApacheFormat;
```

```
ok 6 - use Data::Dumper;
```

```
ok 7 - use Date::Format;
```

```
ok 8 - use DBD::mysql;
```

```
ok 9 - use DBD::Pg;
```

```
ok 10 - use DBD::SQLite;
```

```
ok 11 - use DBI;
```

```
ok 12 - use Digest::MD5;
```

```
ok 13 - use Digest::SHA;
```

```
ok 14 - use Fcntl;
```

```
ok 15 - use File::Basename;
```

```
ok 16 - use File::Glob;
```

```
ok 17 - use File::MimeInfo;
```

```
ok 18 - use GD;
```

```
ok 19 - use GD::Graph::area;
```

```
ok 20 - use Getopt::Long::Descriptive;
```

```
ok 21 - use HTML::Entities;
```

```
ok 22 - use Image::Info;
```

```
ok 23 - use IO::Interface::Simple;
```

```
ok 24 - use IO::Select;
```

```
ok 25 - use IO::Socket;
```

```
ok 26 - use IO::Socket::INET;
```

```
ok 27 - use IO::Socket::Multicast;
```

```
ok 28 - use LWP::UserAgent;
```

```
ok 29 - use MP3::Info;
```

```
ok 30 - use MP4::Info;
```

```
ok 31 - use Net::IP;
```

```
ok 32 - use Net::Netmask;
```

```

ok 33 - use Ogg::Vorbis::Header::PurePerl;
ok 34 - use POSIX;
ok 35 - use Proc::ProcessTable;
ok 36 - use SOAP::Lite;
ok 37 - use Socket;
ok 38 - use Sys::Hostname;
ok 39 - use Sys::Syslog;
ok 40 - use threads;
ok 41 - use threads::shared;
ok 42 - use Time::HiRes;
ok 43 - use URI::Split;
ok 44 - use XML::Simple;

-----

Step 2:
Testing for necessary Perl Modules for installation ...

-----

ok 45 - use File::Copy;
ok 46 - use File::Copy::Recursive;

-----

Step 3:
Installing files ...

-----

ok 47 - Installed './usr/lib/perl5/PDLNA' to '/opt/pDLNA/usr/lib/perl5/PDLNA'.
ok 48 - Set rights for '/opt/pDLNA/usr/lib/perl5/PDLNA'.
ok 49 - Installed './usr/sbin/pDLNA.pl' to '/opt/pDLNA/usr/sbin/pDLNA.pl'.
ok 50 - Set rights for '/opt/pDLNA/usr/sbin/pDLNA.pl'.
ok 51 - Installed './etc/pdlna.conf' to '/etc/pdlna.conf'.
ok 52 - Set rights for '/etc/pdlna.conf'.
ok 53 - Installed './external_programs' to '/opt/pDLNA/external_programs'.
ok 54 - Set rights for '/opt/pDLNA/external_programs'.
ok 55 - Installed './VERSION' to '/opt/pDLNA/VERSION'.
ok 56 - Set rights for '/opt/pDLNA/VERSION'.
ok 57 - Installed './etc/init.d/pdlna' to '/etc/init.d/pdlna'.
ok 58 - Set rights for '/etc/init.d/pdlna'.
ok 59 - Installed './README' to '/opt/pDLNA/README'.
ok 60 - Set rights for '/opt/pDLNA/README'.
ok 61 - Installed './LICENSE' to '/opt/pDLNA/LICENSE'.
ok 62 - Set rights for '/opt/pDLNA/LICENSE'.

-----

Step 4:
Setting of relevant paths ...

-----

ok 63 - Changed path for binary in '/etc/init.d/pdlna'.
ok 64 - Changed path for lib in '/opt/pDLNA/usr/sbin/pDLNA.pl'.

-----

Step 5:
Checking for pDLNA Perl Modules ...

-----

ok 65 - use PDLNA::Config;
ok 66 - use PDLNA::ContentLibrary;
ok 67 - use PDLNA::Daemon;
ok 68 - use PDLNA::Database;
ok 69 - use PDLNA::Devices;
ok 70 - use PDLNA::FFmpeg;
ok 71 - use PDLNA::HTTPServer;
ok 72 - use PDLNA::HTTPXML;
ok 73 - use PDLNA::Log;
ok 74 - use PDLNA::Media;
ok 75 - use PDLNA::SOAPClient;
ok 76 - use PDLNA::SOAPMessages;
ok 77 - use PDLNA::SpecificViews;
ok 78 - use PDLNA::SSDP;

```

```
ok 79 - use PDLNA::Statistics;
ok 80 - use PDLNA::Status;
ok 81 - use PDLNA::Utils;
ok 82 - use PDLNA::WebUI;
1..82
```

After configuring your *pDLNA* installation (see chapter 6), you are able to start *pDLNA* by executing the following command:

```
pdlna@mediaserver:~$ sudo /etc/init.d/pdlna start
```

3.3.3 Updating pDLNA

As described in the section 3.3.1, start by downloading the latest release of *pDLNA*. After extracting the downloaded tarball and checking for requirements by executing `install.pl -c` (as described in section 3.3.2), it is possible to update the *pDLNA* installation by executing the following command:

```
pdlna@mediaserver:/tmp/pDLNA$ sudo perl install.pl -u
```

```
-----
Step 1:
```

```
Testing for necessary Perl Modules ...
-----
```

```
ok 1 - use Audio::FLAC::Header;
ok 2 - use Audio::Wav;
ok 3 - use Audio::WMA;
ok 4 - use Config;
ok 5 - use Config::ApacheFormat;
ok 6 - use Data::Dumper;
ok 7 - use Date::Format;
ok 8 - use DBD::mysql;
ok 9 - use DBD::Pg;
ok 10 - use DBD::SQLite;
ok 11 - use DBI;
ok 12 - use Digest::MD5;
ok 13 - use Digest::SHA;
ok 14 - use Fcntl;
ok 15 - use File::Basename;
ok 16 - use File::Glob;
ok 17 - use File::MimeInfo;
ok 18 - use GD;
ok 19 - use GD::Graph::area;
ok 20 - use Getopt::Long::Descriptive;
ok 21 - use HTML::Entities;
ok 22 - use Image::Info;
ok 23 - use IO::Interface::Simple;
ok 24 - use IO::Select;
ok 25 - use IO::Socket;
ok 26 - use IO::Socket::INET;
ok 27 - use IO::Socket::Multicast;
ok 28 - use LWP::UserAgent;
ok 29 - use MP3::Info;
ok 30 - use MP4::Info;
ok 31 - use Net::IP;
ok 32 - use Net::Netmask;
ok 33 - use Ogg::Vorbis::Header::PurePerl;
ok 34 - use POSIX;
ok 35 - use Proc::ProcessTable;
ok 36 - use SOAP::Lite;
ok 37 - use Socket;
```

```

ok 38 - use Sys::Hostname;
ok 39 - use Sys::Syslog;
ok 40 - use threads;
ok 41 - use threads::shared;
ok 42 - use Time::HiRes;
ok 43 - use URI::Split;
ok 44 - use XML::Simple;
-----
Step 2:
Testing for necessary Perl Modules for installation ...
-----
ok 45 - use File::Copy;
ok 46 - use File::Copy::Recursive;
-----
Step 3:
Installing files ...
-----
ok 47 - Installed './usr/lib/perl5/PDLNA' to '/opt/pDLNA/usr/lib/perl5/PDLNA'.
ok 48 - Set rights for '/opt/pDLNA/usr/lib/perl5/PDLNA'.
ok 49 - Installed './usr/sbin/pDLNA.pl' to '/opt/pDLNA/usr/sbin/pDLNA.pl'.
ok 50 - Set rights for '/opt/pDLNA/usr/sbin/pDLNA.pl'.
ok 51 - Did not install './etc/pdlna.conf' to '/etc/pdlna.conf', since we are
       only upgrading the installation.
ok 52 - Installed './external_programs' to '/opt/pDLNA/external_programs'.
ok 53 - Set rights for '/opt/pDLNA/external_programs'.
ok 54 - Installed './VERSION' to '/opt/pDLNA/VERSION'.
ok 55 - Set rights for '/opt/pDLNA/VERSION'.
ok 56 - Installed './etc/init.d/pdlna' to '/etc/init.d/pdlna'.
ok 57 - Set rights for '/etc/init.d/pdlna'.
ok 58 - Installed './README' to '/opt/pDLNA/README'.
ok 59 - Set rights for '/opt/pDLNA/README'.
ok 60 - Installed './LICENSE' to '/opt/pDLNA/LICENSE'.
ok 61 - Set rights for '/opt/pDLNA/LICENSE'.
-----
Step 4:
Setting of relevant paths ...
-----
ok 62 - Changed path for binary in '/etc/init.d/pdlna'.
ok 63 - Changed path for lib in '/opt/pDLNA/usr/sbin/pDLNA.pl'.
-----
Step 5:
Checking for pDLNA Perl Modules ...
-----
ok 64 - use PDLNA::Config;
ok 65 - use PDLNA::ContentLibrary;
ok 66 - use PDLNA::Daemon;
ok 67 - use PDLNA::Database;
ok 68 - use PDLNA::Devices;
ok 69 - use PDLNA::FFmpeg;
ok 70 - use PDLNA::HTTPServer;
ok 71 - use PDLNA::HTTPXML;
ok 72 - use PDLNA::Log;
ok 73 - use PDLNA::Media;
ok 74 - use PDLNA::SOAPClient;
ok 75 - use PDLNA::SOAPMessages;
ok 76 - use PDLNA::SpecificViews;
ok 77 - use PDLNA::SSDP;
ok 78 - use PDLNA::Statistics;
ok 79 - use PDLNA::Status;
ok 80 - use PDLNA::Utils;
ok 81 - use PDLNA::WebUI;
1..81

```

IMPORTANT NOTE: Executing `install.pl -u` will not overwrite an already existing `/etc/pdlna.conf` configuration file.

After successfully updating the *pDLNA* installation, the command

```
pdlna@mediaserver:~$ sudo /etc/init.d/pdlna restart
```

will restart *pDLNA* and the updated version is going to be started.

Chapter 4

Installing on Windows

Currently installing and running *pDLNA* has not been tested on a Microsoft Windows operation system yet. Please contact me about your experiences regarding installation and/or executing *pDLNA* on Windows.

NOTE: If somebody is interested into porting and maintaining *pDLNA* for Windows, please contact me and start doing it. Thanks.

Chapter 5

Installing on MacOS X

pDLNA has not been tested on a MacOS X operating system yet either. So please contact me about your experiences regarding installation and/or executing *pDLNA* on a Apple operating system.

NOTE: In fact, you should be able to install *pDLNA* similar as described in chapter 3.

NOTE: If somebody is interested into porting and maintaining *pDLNA* for MacOS X, please contact me and start doing it. Thanks.

Chapter 6

Configuration

This chapter gives an overview about the possible parameters to configure *pDLNA* and describes their functionality and their possible impact on the installation. By default, the configuration file is stored in `/etc/pdlna.conf`. If you would like to change the location of the configuration file, you need to change the following line in the initscript (by default `/etc/init.d/pdlna`) to the correct location:

```
CFGFILE="/etc/pdlna.conf"
```

Some of the available configuration parameters are binary values, which can be enabled or disabled. To enable one of those parameters, simply configure the parameter to one of the following values:

- `on`
- `true`
- `yes`
- `enabled`
- `enable`
- `1`

The parsing of these values is case insensitive and if you would like to disable one of these parameters, simply use another value (e.g. `disabled`, `Off` or even `foo`).

There might also be some configuration parameters which are marked as **EXPERIMENTAL**. Please use them carefully.

6.1 Global parameters

6.1.1 FriendlyName

The *FriendlyName* configures a name, which will be shown by all capable DNLA devices to identify a running digital media server. The maximum length of the *FriendlyName* is limited to 32 characters and the allowed characters are:

- letters and number
- spaces and dots
- dashes and underscores

Additionally, you are able to use the in table 6.1 listed variables in the *FriendlyName*.

VARIABLE	DESCRIPTION
<code>\$VERSION</code>	the currently running version, for instance v0.70.1
<code>\$HOSTNAME</code>	the systems hostname
<code>\$OS</code>	the operating system's name

Table 6.1: Available FriendlyName configuration variables

By default, the *FriendlyName* will be set to `pDLNA $VERSION on $HOSTNAME` or you are able to define your *FriendlyName* by configuring it like this:

```
FriendlyName 'pDLNA $VERSION on $HOSTNAME'
```

It might happen, that the default value, based on the hostname, generates a *FriendlyName* which is longer than 32 characters. In this case, please specify the *FriendlyName* manually.

6.1.2 Check4Updates

If *Check4Updates* is enabled, the running *pDLNA* installation will check every 24 hours, if there is a new version of *pDLNA* available. Therefore, *pDLNA* will do a HTTP request to `www.pdlna.org/cgi-bin/status.pl` and transmits its **version number** including the information if it is a **beta release** and the configured or generated **UUID** as XML data to the server. The response from the server is XML data too, which will be evaluated by the running *pDLNA* installation and the result will be logged by the running *pDLNA* installation.

If you do not like *pDLNA* to check for a new version, you are able to deactivate this feature by adding the following line to your configuration file:

```
Check4Updates Off
```

6.1.3 Check4UpdatesNotification

If *Check4Updates* and *Check4UpdatesNotification* is enabled and a device with a `urn:samsung.com:serviceId:MessageBoxService` is connected, *pDLNA* will send a message regarding an available update to this service.

You are also able to deactivate this *FunFeature* by adding the following line to your configuration file:

```
Check4UpdatesNotification Off
```

6.1.4 EnableGeneralStatistics

With the *EnableGeneralStatistics* configuration parameter, you are able to specify if *pDLNA* should store statistics data like

- memory usage
- amount of media items

in the database and should draw graphs in the WebUI.

By default, this feature is activated and you are able to deactivate it by adding the following line to your configuration file:

```
EnableGeneralStatistics Off
```

6.1.5 EnableDBStatistics (EXPERIMENTAL)

This *EnableDBStatistics* configuration parameters enables *pDLNA* to store information about most of the database queries.

By default, this feature is deactivated and you are able to activate it by adding the following line to your configuration file:

```
EnableDBStatistics On
```

IMPORTANT NOTE: Enabling this feature will decrease the performance of your *pDLNA* installation and should only be used to do some investigations to improve database performance.

6.1.6 PIDFile

This parameter specifies the location of the *PIDFile*, which is used to store the process ID of a running *pDLNA* installation. By default, the parameter is set to `/var/run/pdlna.pid` or you are able to specify a different location by configuring it like this:

```
PIDFile /var/run/pdlna.pid
```

IMPORTANT NOTE: Please ensure, that the user, which is running *pDLNA*, has permissions to write to the configured path.

6.1.7 TempDir

This parameter defines the directory, where *pDLNA* will store temporary files for thumbnails and so on. By default, this parameter is set to `/tmp` or you are able to specify a different location by configuring it like this:

```
TempDir /tmp
```

IMPORTANT NOTE: Please ensure, that the user, which is running *pDLNA*, has permissions to write to the configured path.

6.2 Database configuration

6.2.1 DatabaseType

The parameter *DatabaseType* defines the database, which is used by *pDLNA* to store all the necessary information (like the media items, which are member of the media library). Currently the following database types (which are listed in table 6.2) are available.

PARAMETER	DESCRIPTION
SQLITE3	SQLite database in version 3
MYSQL	MySQL database
PGSQL	PostgreSQL database

Table 6.2: Available DatabaseType configuration parameters

By default, this parameter is set to **SQLITE3** or you are able to specify a different database type by configuring it like this:

DatabaseType MYSQL

NOTE: Using MySQL as a database for *pDLNA* improves the performance and is recommended. A short performance comparison between a SQLite and MySQL backend can be accessed on <http://www.pdlna.org/cgi-bin/index.pl?menu=news&id=c586fc819a>.

Preparing MySQL for pDLNA

At first, you do need a running MySQL server on the machine, which is running *pDLNA*. This is possible to achieve by executing the following command

```
pdlna@mediaserver:~$ sudo apt-get install mysql-server
```

on a Debian GNU/Linux distribution and its variants.

To use MySQL as a database server for *pDLNA*, creating a database and a separate user is recommended. This can be achieved by logging in as an administrative user (for instance **root**) and executing the following commands:

```
pdlna@mediaserver:~$ mysql -u root -p
Enter password:
Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 8896

Type 'help;' or '\h' for help. Type '\c' to clear the buffer.

mysql> CREATE DATABASE pdlna CHARACTER SET utf8 COLLATE utf8_general_ci;
mysql> GRANT USAGE ON pdlna.* TO pdlna@localhost IDENTIFIED BY
'<yourpassword>';
mysql> GRANT ALL privileges ON pdlna.* TO pdlna@localhost;
```

Finally, *pDLNA* needs to be configured to use the created MySQL database with the according username and password. This is described in the following two sections 6.2.2 and 6.2.3.

Preparing PostgreSQL for pDLNA

As described in section 6.2.1, a running PostgreSQL server is required for this configuration. On a Debian GNU/Linux distribution and its variants, a PostgreSQL server can be installed by executing the following command:

```
pdlna@mediaserver:~$ sudo apt-get install postgresql
```

To use PostgreSQL as a database backend for *pDLNA*, creating a database and a separate user is recommended. This can be achieved by logging in as an administrative user and executing the following commands:

```
root@mediaserver:~# su - postgres
postgres@mediaserver:~$ createdb -E UTF8 pdlna
postgres@mediaserver:~$ psql pdlna
psql (9.1.11)
Type "help" for help.

pdlna=# CREATE USER pdlna WITH PASSWORD '<yourpassword>';
CREATE ROLE
pdlna=# \q
```

For PostgreSQL, the database encoding must be specified when the database is created. If it is not, the database will have to be dumped and re-imported into a new database.

6.2.2 DatabaseName

Configuring the parameter *DatabaseName* depends on the configuration parameter *DatabaseType*.

SQLite database in version 3

This parameter defines the location, where *pDLNA* will store the SQLite database file itself. By default, this parameter is set to `/tmp/pdlna.db` or you are able to specify a different location by configuring it like this:

```
DatabaseName /tmp/pdlna.db
```

IMPORTANT NOTE: Please ensure, that the user, which is running *pDLNA*, has permissions to write to the configured path.

MySQL or PostgreSQL database

This configuration parameter defines the name of the database, which should be used by *pDLNA*. By default, this parameter is set to `pdlna` or you are able to specify a different database by configuring it like this:

```
DatabaseName pdlna
```

6.2.3 DatabaseUsername and DatabasePassword

These two configuration parameters need to be configured, if the *DatabaseType* is configured to *MYSQL* or to *PGSQL* (see section 6.2.1) and represent the authentication information for the configured database server.

These configuration parameters can be configured like this:

```
DatabaseUsername pdlna
DatabasePassword <yourpassword>
```

By default, if no *DatabaseUsername* is configured, it will be set to *pdlna*. And if no *DatabasePassword* is configured, no password will be used to authenticate to the database.

IMPORTANT NOTE: It is not recommended to use the database server's administrative (for instance *root*) user.

6.3 Network configuration

If you are not sure about the installed network interfaces and configured IP addresses, execute the following command:

```
pdlina@mediaserver:~$ sudo ip addr
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 16436 qdisc noqueue state UNKNOWN
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state
    UNKNOWN qlen 1000
    link/ether 00:0c:29:bc:fc:da brd ff:ff:ff:ff:ff:ff
    inet 192.168.145.139/24 brd 192.168.145.255 scope global eth0
    inet6 fe80::20c:29ff:febc:fcda/64 scope link
        valid_lft forever preferred_lft forever
```

In the following two sections regarding the configuration of *ListenInterface* and *ListenIPAddress* this output will be taken as an example.

6.3.1 ListenInterface

The *ListenInterface* parameter specifies the network interface, *pDLNA* should be using. If the parameter is **not** specified, *pDLNA* will try to determine the first active network interface with an IP address.

In case, that *pDLNA* was not able to determine the correct network interface, you need to specify it by the following configuration line:

```
ListenInterface eth0
```

6.3.2 ListenIPAddress

The *ListenIPAddress* parameter specifies the IP address, *pDLNA* should use to communicate with the *DLNA* capable devices. If *ListenIPAddress* is **not** specified, *pDLNA* will try to determine the first IP address on the configured or even detected *ListenInterface* configuration parameter. Otherwise you are able to define it by configuring *ListenIPAddress* like this:

```
ListenIPAddress 192.168.145.139
```

6.3.3 HTTPPort

The *HTTPPort* parameter defines the TCP port, which should be used by the integrated HTTP server. By default it will be set to 8001 or you are able to define another by the following parameter:

```
HTTPPort 8001
```

IMPORTANT NOTE: Please ensure, that the configured TCP port is **not** used by any other application, otherwise *pDLNA* will not be able to start up correctly.

6.3.4 AllowedClients

For reasons of data privacy, you need to specify IP address(es) and/or subnet(s), which should be able to communicate with *pDLNA*. *SSDP* is limited to the local subnet because of the Multicast communication (as long as there is no multicast routing), but HTTP is not limited to the local subnet.

Nevertheless, *pDLNA* listens additionally to the already mentioned *HTTP-Port* (see section 6.3.3) to UDP communication on port 1900 and it is recommended to restrict the *AllowedClients* as good as possible.

```
AllowedClients 192.168.145.2, 192.168.145.128/26, \  
192.168.145.192/255.255.255.252
```

IMPORTANT NOTE: if **none** are specified, the local subnet matching the *ListenIPAddress* will be configured automatically. Please limit the number of hosts.

IMPORTANT NOTE: The hosts, which should access the WebUI (see chapter 7) have also to be added to the *AllowedClients* configuration parameter.

6.4 SSDP configuration

6.4.1 CacheControl

CacheControl represents a parameter in the *Simple Service Discovery Protocol (SSDP)* and defines the time in seconds, clients will cache the server's information. The value has impact on the interval *pDLNA* is going to send out its *SSDP* alive messages.

Most devices and *pDLNA* use as a default value 1800 seconds. If you would like to use a different value, define it in seconds like this:

```
CacheControl 1800
```

IMPORTANT NOTE: Changing this value **may** result into malfunction of *pDLNA*.

6.4.2 UUID

The *Universally Unique Identifier (UUID)* is used in the *Simple Service Discovery Protocol (SSDP)* as an unique identifier. RFC 4122¹ describes the format and the different methods to generate a UUID.

The available configuration parameters are listed in table 6.3. If **none** is specified, **Version4** will be used or you are able to change the parameter by the following line:

```
UUID Version4MAC
```

IMPORTANT NOTE: the method for generating the UUIDs are **not** (completely) compliant to RFC 4122 and are **only** pseudo-random.

PARAMETER	DESCRIPTION
Version3	the hostname's MD5 checksum
Version4	random generated UUID
Version4MAC	random generated UUID including the MAC address of the configured <i>ListenInterface</i> in the end
Version5	the hostname's SHA-1 checksum
<staticUUID>	define a static UUID, which is formatted like 56657273-696f-6e34-4d41-000c29bcfcda

Table 6.3: Available UUID configuration parameters

¹www.ietf.org/rfc/rfc4122.txt

6.5 DLNA configuration

6.5.1 BufferSize

The *BufferSize* defines the default size of a chunk, which is used to transfer streaming data. The default value for the *BufferSize* is 32768. The following example shows how to change the value:

```
BufferSize 1337
```

IMPORTANT NOTE: Changing this value **may** result into malfunction of *pDLNA* or may even result into a crash of your system because of high memory usage.

6.5.2 SpecificViews (EXPERIMENTAL)

The *SpecificViews* configuration parameters enables for specific *DLNA* aware devices, like

- Samsung TV

a different method for directory listings. By default, this value is disabled. To enable this feature, simply configure it by adding the following line to your configuration file:

```
SpecificViews Off
```

IMPORTANT NOTE: Enabling *SpecificViews* in the current version will result in not being able to fulfill a directory listing request on a *Samsung TV*.

6.5.3 EnableImageThumbnails

By switching the parameter *EnableImageThumbnails* on or off, you are able to decide if preview thumbnails of images should be displayed on capable devices. By default, this feature is deactivated.

IMPORTANT NOTE: Enabling *EnableImageThumbnails* might decrease the performance of directory listings.

```
EnableImageThumbnails On
```

6.5.4 EnableVideoThumbnails

By switching the parameter *EnableVideoThumbnails* on or off, you are able to decide if preview thumbnails of video files should be displayed on capable devices. By default, this feature is deactivated.

IMPORTANT NOTE: Enabling *EnableVideoThumbnails* might decrease the performance of directory listings and will require FFmpeg.

```
EnableVideoThumbnails On
```

6.5.5 LowResourceMode

By default, *pDLNA* opens (after indexing) every single video and audio file with FFmpeg to determine its codecs, length and various other attributes.

This behaviour is not really IO friendly and takes some time. The chart on <http://www.pdlna.org/cgi-bin/index.pl?menu=news&id=c586fc819a> might give you an overview regarding that invested time.

Because of small devices, with limited resources like CPU or IO, enabling the *LowResourceMode* skips gathering this additional information.

By default, *LowResourceMode* is disabled, but can be enabled by adding the following line to the configuration file:

```
LowResourceMode On
```

IMPORTANT NOTE: Enabling *LowResourceMode* will decrease the usability and disable some features:

- **Limited information:** No information like codecs, length and various other attributes will be gathered from a media file itself.
- **Directory Listings:** Because of this limited information, directory listings might not be as beautiful as when *LowResourceMode* is disabled.

When *LowResourceMode* is enabled, *pDLNA* will ignore *External* and *Transcode* configuration blocks. *pDLNA* will also **not** index audio or video streams as elements from a playlist.

Therefore FFmpeg is not required at all.

6.5.6 FFmpegBinaryPath

pDLNA has to use FFmpeg, if *LowResourceMode* (see previous section 6.5.5) is disabled, for transcoding and gathering information about media files. So it is necessary to configure *FFmpegBinaryPath* with the correct path of FFmpeg's binary. The default path for FFmpeg's binary is set to `/usr/bin/ffmpeg`. For detailed information about FFmpeg please see section 2.2.1.

```
FFmpegBinaryPath /usr/bin/ffmpeg
```

6.6 Logging

6.6.1 LogFile

The *LogFile* configuration parameter defines the logging location of *pDLNA*. Table 6.4 gives an overview about the available configuration options.

PARAMETER	DESCRIPTION
STDERR	all logging output will be printed to <i>STDERR</i>
SYSLOG	all logging output will be logged to syslog
<full path to log file>	specify a full path to a file, <i>pDLNA</i> should use as a logfile (like <i>/var/log/pdlna.log</i>)

Table 6.4: Available LogFile configuration parameters

IMPORTANT NOTE: Please ensure, that the user, which is running *pDLNA* has permissions to write to the configured path.

If *LogFile* is not specified, *pDLNA* will print all logging output to *STDERR*.

```
LogFile /var/log/pdlna.log
```

6.6.2 LogFileMaxSize

pDLNA is able to keep track of the logfile's size and clear it, if the size exceeds a value specified by *LogFileMaxSize* in Megabytes. The configured value has to be **greater than 0 and less than 100**.

By default, *LogFileMaxSize* is set to 10 Megabytes.

```
LogFileMaxSize 10
```

6.6.3 LogFileRotation

pDLNA is able to rotate logfiles on his own. This *LogFileRotation* configuration parameter defines, how many logfiles will be stored, if the logfile's size exceeds the *LogFileMaxSize* configuration parameter.

For instance, a configured *LogFileRotation* parameter of 4 will tell *pDLNA* to keep four old logfiles. A directory listing would look like:

```
pdlna@mediaserver:~$ ls /var/log/pdlna.log*
/var/log/pdlna.log  /var/log/pdlna.log.2 /var/log/pdlna.log.4
/var/log/pdlna.log.1 /var/log/pdlna.log.3
```

By default, *LogFileRotation* is set to 0, which will result in removing old log information after rotation.

```
LogFileRotation 4
```

6.6.4 LogLevel

pDLNA is capable to differentiate between different kind of log messages by their *LogLevel*. Specifying a higher *LogLevel* will result in more detailed logging messages including the messages of the lower *LogLevels*. Please see table 6.5 for detailed information about the different *LogLevel*

If *LogLevel* is **not** specified, it will be set to 0.

LOGLEVEL	DESCRIPTION
0	normal and error messages
1	debug
2	debug 2
3	debug 3

Table 6.5: Available LogLevel configuration parameters

```
LogLevel 1
```

6.6.5 LogCategory

pDLNA is also capable to differentiate between different kind of log messages by their *LogCategory*. To activate log messages of one of the categories listed in table 6.6, simply configure them via a comma separated list, like in the following example, which will enable all available categories:

```
LogCategory discovery,httpdir,httpstream,library,httpgeneric,  
database,transcoding,soap
```

By default, only some generic messages will be logged and **none** of these categories are enabled.

LOGCATEGORY	DESCRIPTION
discovery	SSDP messages
httpdir	messages from the directory listings via HTTP
httpstream	messages from the streaming via HTTP
library	messages from building the media library
httpgeneric	generic HTTP messages
database	Database log messages, like queries and so on
transcoding	Transcoding log messages
soap	SOAP log messages

Table 6.6: Available LogCategory configuration parameters

6.6.6 DateFormat

By configuring *DateFormat*, you are able to define the format of time and date in log or debug messages. The following table 6.7 shows valid variables, their value and other valid characters to format the *DateFormat* string.

If *DateFormat* is **not** specified, it will be set to `%Y-%m-%d %H:%M:%S`, which will result for instance in 2012-12-21 13:37:00. Otherwise configure the parameter by adding the following line to the configuration file.

```
DateFormat '%Y-%m-%d %H:%M:%S'
```

VARIABLES	DESCRIPTION
%m	number of month
%d	numeric day of the month
%H	hour, 24 hour clock
%I	hour, 12 hour clock
%p	AM or PM
%M	minute
%S	second
%s	seconds since the epoch, UCT (aka unixtimestamps)
%o	ornate day of month – 1st, 2nd, 25th, etc.
%Y	year
%Z	timezone in ascii. eg: PST
, - _ : and spaces	characters to format the date string

Table 6.7: Available DateFormat configuration variables

6.7 Media Configuration

6.7.1 RescanMediaInterval

By configuring *RescanMediaInterval*, you are able to define the interval, when *pDLNA* recrawls the configured media directories (including found playlist files) and external media items.

The following table 6.8 shows valid variables and their descriptions to configure *RescanMediaInterval*.

RESCANMEDIAINTERVAL	DESCRIPTION
never	never recrawl the media directories
hourly	media library will be marked as expired after 60 minutes
halfdaily	media library will be marked as expired after 12 hours
daily	media library will be marked as expired after 24 hours

Table 6.8: Available RescanMediaInterval configuration variables

If *RescanMediaInterval* is **not** specified, it will be set to **daily**.

RescanMediaInterval daily

6.7.2 Directory

By default and for reasons of data privacy, *pDLNA* will **not** scan automatically for media files and will **not** add them automatically to the media library.

Therefore you need to configure your media directories in the configuration file in a configuration block called **<Directory>**. Each of these blocks can be configured separately with parameters, which are described in table 6.9.

Additionally, table 6.10 gives an overview about the different media types and their mime types.

PARAMETER	INFORMATION	DESCRIPTION
MediaType	obligatory	specify the type of media files, which should be crawled: video , audio , image , all
Recursion	optional, by default: yes	specify if these directories should be crawled recursively (by yes or no)
ExcludeDirs	optional	exclude a comma seperated list of directory names from being crawled and added to the media library
ExcludeItems	optional	exclude a comma seperated list of file names from being crawled and added to the media library
AllowPlaylists	optional, by default: no	enable AllowPlaylists configuration parameter to initialize playlist files

Table 6.9: Available Directory block configuration parameters

MEDIA TYPE	MIME TYPES
video	video/x-msvideo, video/x-matroska, video/mp4, video/mpeg, video/x-flv
audio	audio/mpeg, audio/mp4, audio/x-ms-wma, audio/x-flac, audio/x-wav, video/x-theora, audio/ac3, audio/x-aiff
image	image/jpeg, image/gif
Playlist	audio/x-scpls, audio/x-mpegurl, application/vnd.apple.mpegurl, audio/x-ms-asx, video/x-ms-asf, application/xspf+xml

Table 6.10: Supported MimeTypes

The following configuration block will crawl the directory `/media/video/` **recursively** for only **video** files.

```
<Directory "/media/video/">
  MediaType      video
  Recursion      yes
</Directory>
```

The next configuration snippet will crawl the directory `/media/music/` **recursively** for only **music** files. Additionally *pDLNA* excludes directories which are called Justin Bieber or Lady Gaga and also ignores files with the following names: `justin_bieber.mp3` or `lady_gaga.mp3`. Additionally, if *pDLNA* finds a **Playlist** file, *pDLNA* will also add it to the media library.

```
<Directory "/media/music/">
  MediaType      audio
  ExcludeDirs    "Justin Bieber,Lady Gaga"
  ExcludeItems   "justin_bieber.mp3,lady_gaga.mp3"
  AllowPlaylists true
</Directory>
```

The third configuration example will crawl the directory `/media/images/` **recursively** for only **images**.

```
<Directory "/media/images/">
  MediaType      image
</Directory>
```

And the last snippet crawls the directory `/media/misc/` **not recursively** for all sort of media files but not for **Playlist files**.

```
<Directory "/media/misc/">
  MediaType      all
  Recursion      no
  AllowPlaylists off
</Directory>
```

6.7.3 External media items and Streams

IMPORTANT NOTE: This feature is currently not available in *pDLNA* in version 0.70.1. If you would like to use external media items or streams, please use *pDLNA* in version 0.64.3. External media items will be readded to *pDLNA* in the future.

6.8 Transcoding Profiles

IMPORTANT NOTE: This feature is currently not available in *pDLNA* in version 0.70.1. If you would like to use Transcoding, please use *pDLNA* in version 0.64.3. Transcoding will be readded to *pDLNA* in the future.

Chapter 7

WebUI

pDLNA includes a small WebUI, which is accessible via the following URL `http://ListenIPAddress:HTTPPort/webui/`.

IMPORTANT NOTE: If your client's IP address, which you would like to use to access the WebUI, is not included in the *AllowedClients* configuration parameter, you will not be able to access it.

This small WebUI gives the chance to navigate through the indexed media items, have a detailed look on connected *UPnP* and *DLNA* devices and determine some process information like memory usage, the amount and size of indexed media items in the database or even the supported codecs of your *FFmpeg* installation.

The WebUI does have a navigation part (coloured in blue) on the left side of the website. The information itself will be shown on the right side (coloured in white). The navigation is split in three different sections, which will be described in the following three sections.

7.1 Configured media

The screenshot in figure 7.1 shows the landing page of the WebUI, which show the root directory of the media library. It also shows the external media items (if any), which might be configured in the configuration file (see section 6.7.3). In the navigation of the WebUI, in the *Configured media* section, all in the configuration file configured directories (see section 6.7.2) are listed. The number in the brackets after the directory name gives the information, how much items are in this specific directory.

By clicking (in this case) on the *media* directory, the directory tree will be shown as it appears in figure 7.1. With an additional click on the *audio* directory, the files, which are in this directory will be shown in the content part of the WebUI. The content table, as can be seen, shows the information about the filename, the size and the date of the media file.

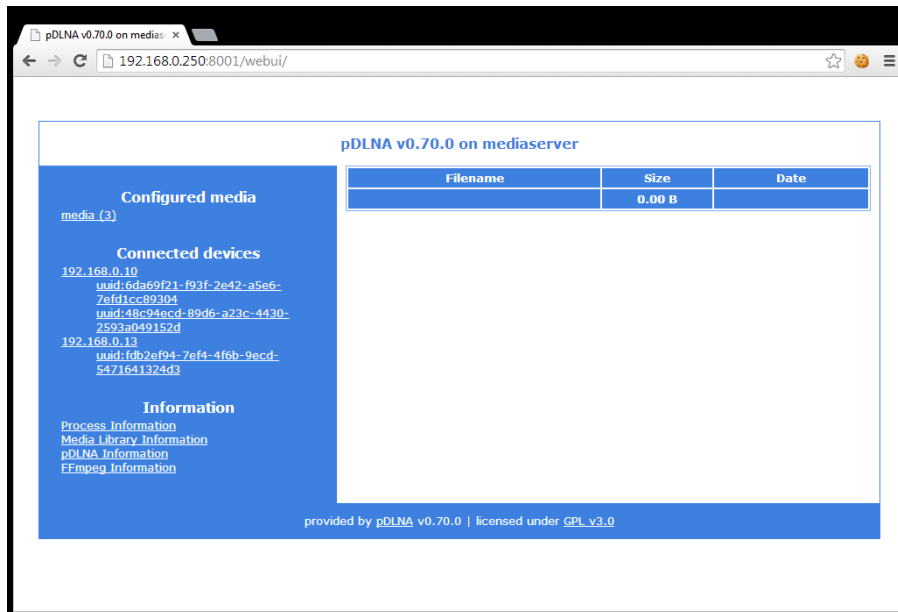


Figure 7.1: WebUI: Landing page

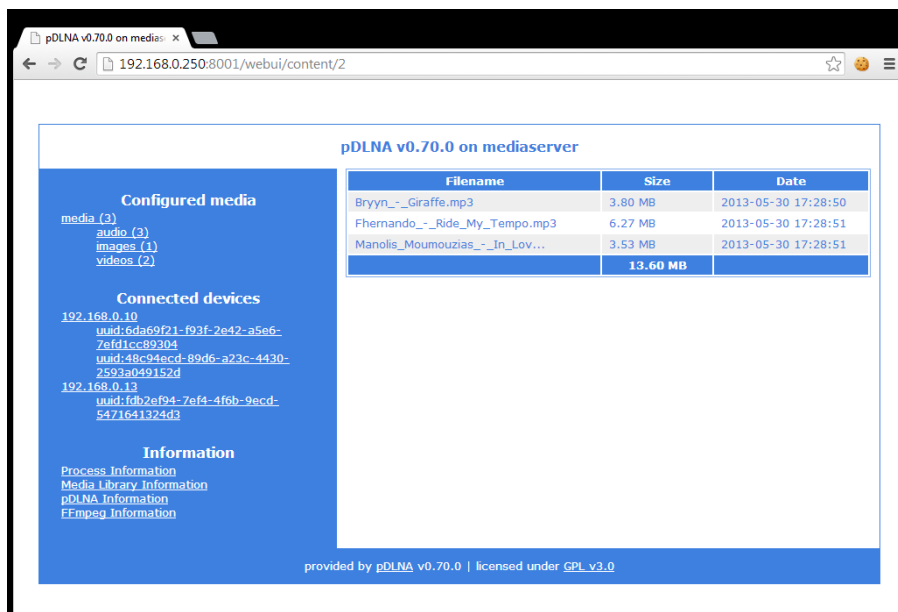


Figure 7.2: WebUI: Directory listing

7.2 Connected devices

The second section in the navigation of the WebUI lists all discovered IP addresses, which are part of your network and do interact somehow with the running *pDLNA* installation. This includes normal clients, which access the

WebUI, other *UPnP* devices, *DLNA* aware TVs or even other *DLNA* media servers.

In the navigation, a list of IP addresses is shown. Additionally, all discovered *UPnP* services, which are served by a specific IP address are also shown in the navigation as subitems.

Figure 7.2 shows in the content part the information after clicking on the IP address *192.168.0.10* in the navigation. This information includes the IP address itself, the *HTTP UserAgent*, which was used by the device and when communication from the IP address was last seen.



Figure 7.3: WebUI: Information about a connected device per IP address

Figure 7.2 shows information, including the friendly name, the device type or the device description URL, after clicking on a service UDN.

7.3 Information

The third section in the navigation includes some various information about the running *pDLNA* installation.

While figure 7.3 shows information about the process itself (including for instance memory and cpu usage), figure 7.3 delivers information about the amount and size of media items included in the media library.

Additionally, the following figure 7.3 shows information about the installed *pDLNA* version and its release date. You are also able to execute a *Check4Updates*, which works as described in section 6.1.2, but shows the result in the WebUI.

And finally, the following figure 7.3 shows information regarding the used *FFmpeg* installation, if the usage of *FFmpeg* is configured.



Figure 7.4: WebUI: Information about a connected device per service

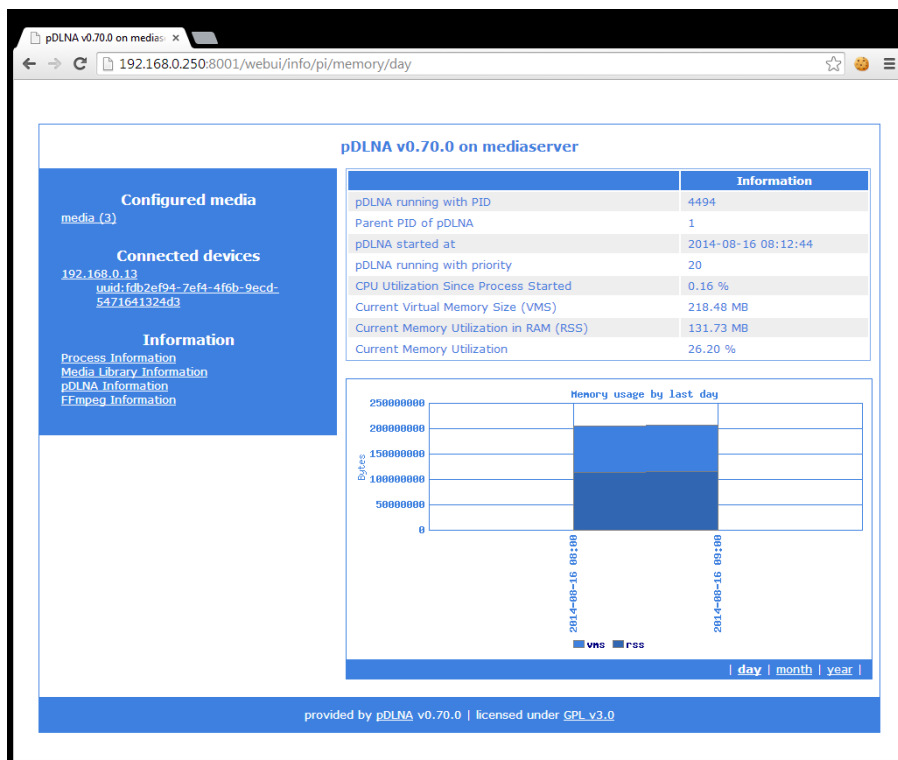


Figure 7.5: WebUI: Process Information

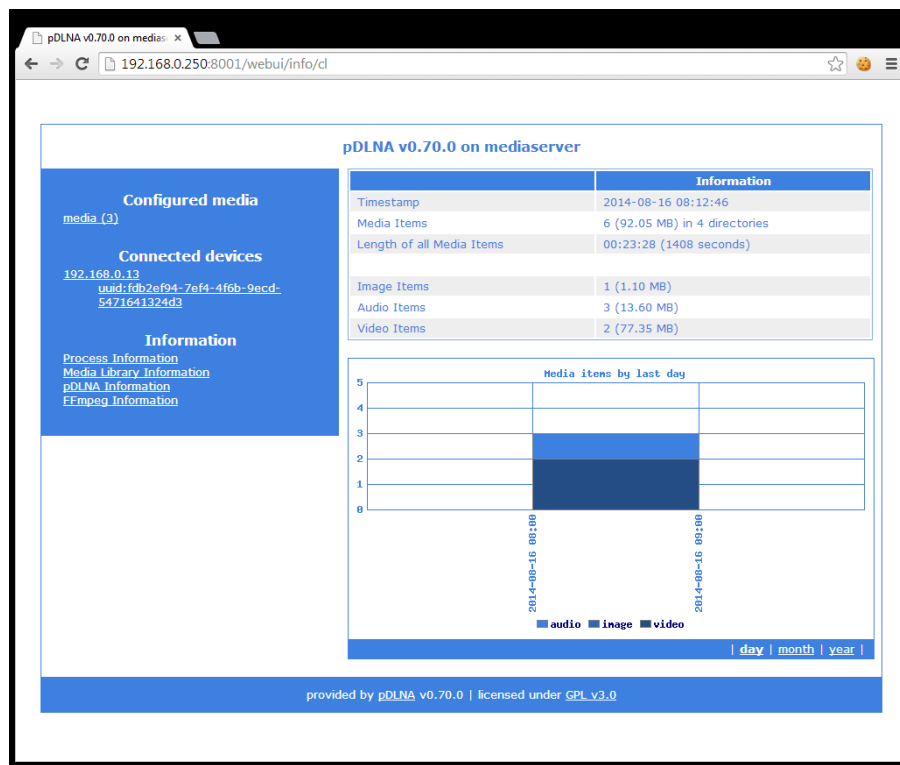


Figure 7.6: WebUI: Media Library Information



Figure 7.7: WebUI: pDLNA Information

The screenshot shows a web browser window with the address bar displaying `192.168.0.250:8001/webui/info/ffmpeg`. The page title is "pDLNA v0.70.0 on mediaserver". The interface is divided into two main sections: a left sidebar and a main content area.

Left Sidebar:

- Configured media**: [media \(3\)](#)
- Connected devices**:
 - [192.168.0.10](#)
 - [uuid:6da69f21-f93f-2e42-a5e6-7efd1cc89304](#)
 - [uuid:48c94ecd-89d6-a23c-4430-2593a049152d](#)
 - [192.168.0.13](#)
 - [uuid:f6b2ef04-7ef4-4f6b-9ecd-5471641324d3](#)
- Information**:
 - [Process Information](#)
 - [Media Library Information](#)
 - [pDLNA Information](#)
 - [FFmpeg Information](#)

Main Content Area:

pDLNA v0.70.0 on mediaserver

	Information
FFmpeg Version	0.8.9-6:0.8.9-1,
Supported decoding formats	aac, ac3, wmv2, flac, mp3, vorbis, wav
Supported encoding formats	ac3, wmv2, flac, aac, mp3, vorbis, wav
Supported decoding audio codecs	aac, ac3, flac, mp3, wav, vorbis, wmv1, wmv2
Supported encoding audio codecs	ac3, flac, mp3, vorbis, wmv1, wmv2

provided by pDLNA v0.70.0 | licensed under [GPL_v3.0](#)

Figure 7.8: WebUI: FFmpeg Information

Chapter 8

Pre-installed virtual machines

Since not everybody is willing to install *pDLNA* on a system, just to verify if *pDLNA* fulfills his needs or just likes to test *pDLNA* for the first time, there are some pre-installed virtual machines available to download from the *pDLNA* website available under the following URL: www.pdlna.org/cgi-bin/index.pl?menu=vm

IMPORTANT NOTE: These pre-installed virtual machines are prepared to have a quick look on *pDLNA* and are not designed to be used in a productive environment or for any other purpose.

These virtual machines are provided in the *Open Virtualization Format* (OVF)¹, which is compatible with virtualization platforms like *VMware*² or *VirtualBox*<https://www.virtualbox.org> and is used to package and distribute virtual appliances.

After downloading a virtual machine package, which contains the VM configuration itself and a virtual harddrive, import it into your favourite virtualization product. These provided virtual machine images might also be importable by any other virtualization product, not only by *VMware* and *VirtualBox*.

IMPORTANT NOTE: All the virtual machines provided contain operating systems that are distributed under an open-source license, but you should refer to the licensing terms of each operating system to know them exactly. Complete license texts are usually available browsing the official website of each project. After a basic installation of the operating system itself, additional software has been installed and configured to run *pDLNA*.

All pre-installed virtual machine images are configured to use SQLite3 as a database.

¹http://en.wikipedia.org/wiki/Open_Virtualization_Format

²<http://www.vmware.com>

While the following section 8.1 gives an overview about the general information, like installation of the operating system or the included media files, section 8.2 describes some per operating system relevant information.

8.1 General information

All the available pre-installed virtual machines are configured the same and do have the following hardware applied:

- 512 megabytes of memory
- harddisk with 10 gigabytes capacity
- one network card which is bridged

Afterwards the operating system has been installed, **english** as language is chosen. Additionally the timezone is set to **Central European Summer Time (CEST)** and the keyboard layout is set to **english** too. Finally, if a package management tool is used by the operating system itself, a mirror from **Austria** is configured. If these settings does not match your needs, please feel free to modify these settings. The following section 8.2 gives you some short information how to change some of these configurations.

With the installation, the password for the superuser **root** is set to **pdlna**. Additionally, another user **pdlna** with the password **pdlna** is created. The networkcard is configured to aquire an IP address via *DHCP*. Also a *SSH* server for remote access and a *NTP* server for time synchronization is installed.

Afterwards, all the necessary packages and Perl modules were installed like described int section 3.1. And finally, *pDLNA* was installed via a **git clone**, by the user **pdlna** to the directory `/home/pdlna/pDLNA/`, which is described in section 3.2. So the configuration file is stored in `/etc/pdlna.conf` and the initscript to start and stop *pDLNA* is stored in `/etc/init.d/pdlna` or `/etc/rc.d/pdlna`.

IMPORTANT NOTE: Every pre-installed virtual machine will not start the *pDLNA* installation automatically at startup. So please start *pDLNA* by executing `/etc/init.d/pdlna start` or `|/etc/rc.d/pdlna start|` with administrative rights.

Because of installing *pDLNA* via **git**, updating the *pDLNA* version of an already downloaded virtual machine can be done, by logging in as the user **pdlna**, changing to the directory `/home/pdlna/pDLNA/` and executing the command **git pull**. And after executing `/etc/init.d/pdlna restart` or `/etc/rc.d/pdlna restart` with administrative rights, the new version of *pDLNA* should be up and running again. This method is described in detail in section 3.2.3.

8.1.1 Included media files

Each pre-installed virtual machine comes with the same media files (to test the functionality), which are licensed under the *Creative Commons* licence³.

³www.creativecommons.org

In each pre-installed virtual machine image, there is a `DISCLAIMER.txt` file in the directory `/home/pdlna/media/`, which lists the included media files, their source and their exact *Creative Commons* licence.

The following list also lists the included media files, their source and their exact *Creative Commons* licence:

- `/home/pdlna/media/audio/Brynn_-_Giraffe.mp3`
 - Source: www.jamendo.com/de/track/725574/giraffe
 - License: creativecommons.org/licenses/by-nc-sa/3.0/
- `/home/pdlna/media/audio/Fhernando_-_Ride_My_Tempo.mp3`
 - Source: www.jamendo.com/de/track/944721/ride-my-tem
 - License: creativecommons.org/licenses/by-nc-sa/3.0/
- `/home/pdlna/media/audio/Manolis_Moumouzias_-_In_Love.mp3`
 - Source: www.jamendo.com/de/track/917546/in-love
 - License: creativecommons.org/licenses/by-nc-sa/3.0/
- `/home/pdlna/media/images/Two-toed_sloth_Costa_Rica_-_cropped.jpg`
 - Source: upload.wikimedia.org/wikipedia/commons/8/8b/Two-toed_sloth_Costa_Rica_-_cropped.jpg
 - License: creativecommons.org/licenses/by/2.5/deed.de
- `/home/pdlna/media/video/episode2.0_xvid.avi`
 - Source: archive.org/details/welcometothescene_version2.0_xvid
 - License: creativecommons.org/licenses/by-nc-nd/3.0/
- `/home/pdlna/media/video/episode2.0_xvid.mp4`
 - Source: archive.org/details/welcometothescene_version2.0_xvid
 - License: creativecommons.org/licenses/by-nc-nd/3.0/

The included media files are chosen by random.

IMPORTANT NOTE: If you are the copyright owner or an agent thereof and do not want your creation to be distributed like this, please contact me and I will remove your creation.

8.2 Specific Information

The following sections describe some specific settings, which are made to the different pre-installed virtual machines and also describes how to change some of the settings like the timezone or the keyboard layout.

```

#####
#
#                               CentOS 6
# Linux mediaserver.localdomain 2.6.32-431.20.3.el6.i686 #1 SMP Thu Jun 19 19:51
# :30 UTC 2014 i686 i686 i386 GNU/Linux
#
#                               pDLNA v0.70.0 (2014-Aug-16)
#                               http://www.pdlna.org
#
# Hostname:  mediaserver.localdomain
# IP Address: 192.168.0.27
#
#####

mediaserver login: _

```

Figure 8.1: Boot-up screen of pre-installed CentOS 6 virtual machine image

8.2.1 CentOS 6

IMPORTANT NOTE: Since FFmpeg is not part of the package management in CentOS 6, *pDLNA* is only able to run in *LowResourceMode* in this pre-installed virtual machine.

Logon customization

The logon customization, as can be seen in figure 8.2.1, is handled by the script `/etc/rc.local`, which was modified to call `/usr/local/bin/update-issue.sh`, which updates the `/etc/issue` and `/etc/issue.net` files. The following three lines have also been added to this file, to delete sensitive data on startup:

```

/bin/rm -f /var/log/pdlna.log
/bin/rm -f /tmp/pdlna.db
/bin/rm -f /var/run/pdlna.pid

```

Additionally, the OpenSSH server's configuration file (`/etc/ssh/sshd_config`) has been modified to use the `/etc/issue.net` file as a banner:

```
Banner /etc/issue.net
```

The `/usr/local/bin/update-issue.sh` script can also be found on GitHub (github.com/geuma/pDLNA-utils/blob/master/preinstalled-VMs/CentOS6/update-issue.sh).

Changing the timezone

In CentOS 6, all the available timezones are stored in the directory `/usr/share/zoneinfo/`. Because of this, changing the timezone can be done via modifying the symlink

for `/etc/localtime` to the corresponding timezone file. An example is listed in the following snippet:

```
pdlna@mediaserver:~$ sudo ln -sf /usr/share/zoneinfo/EST /etc/localtime
```

Changing the keyboard layout

In CentOS 6, all the available keyboard layouts are stored in the directory `/lib/kbd/keymaps/i386`. Changing the keyboard layout can be done via modifying the `KEYTABLE` key in the file `/etc/sysconfig/keyboard` by opening the file with your favourite file editor:

```
pdlna@mediaserver:~$ sudo vi /etc/sysconfig/keyboard
```

Additional documentation can be found here: www.centos.org/docs/5/html/5.1/Deployment_Guide/s2-sysconfig-kybd.html

8.2.2 Debian GNU/Linux 7

Logon customization

The logon customization, as can be seen in figure 8.2.2, is handled by the script `/etc/rc.local`, which was modified to call `/usr/local/bin/update-issue.sh`, which updates the `/etc/issue` and `/etc/issue.net` files. The following three lines have also been added to this file, to delete sensitive data on startup:

```
/bin/rm -f /var/log/pdlna.log  
/bin/rm -f /tmp/pdlna.db  
/bin/rm -f /var/run/pdlna.pid
```

Additionally, the OpenSSH server's configuration file (`/etc/ssh/sshd_config`) has been modified to use the `/etc/issue.net` file as a banner:

```
Banner /etc/issue.net
```

The `/usr/local/bin/update-issue.sh` script can also be found on GitHub (github.com/geuma/pDLNA-utils/blob/master/preinstalled-VMs/Debian7/update-issue.sh).

Changing the timezone

Changing the timezone in Debian GNU/Linux 7 can be done by executing the following command as a superuser and use its wizard to configure the correct timezone.

```
pdlna@mediaserver:~$ sudo dpkg-reconfigure tzdata
```

```
#####
#
#           Debian GNU/Linux 7
# Linux mediaserver 3.2.0-4-486 #1 Debian 3.2.57-3+deb7u1 i686 GNU/Linux
#
#           pDLNA v0.70.0 (2014-Aug-16)
#           http://www.pdlna.org
#
# Hostname: mediaserver
# IP Address: 192.168.0.26
#
#####
mediaserver login: _
```

Figure 8.2: Boot-up screen of pre-installed Debian 7 virtual machine image

Changing the keyboard layout

Changing the keyboard layout is as easy as changing the timezone. Just execute the following command as a superuser and use its wizard to configure the correct keyboard layout.

```
pdlna@mediaserver:~$ sudo dpkg-reconfigure keyboard-configuration
```

8.2.3 FreeBSD 9

Logon customization

The logon customization, as can be seen in figure 8.2.3, is handled by the script `/etc/rc.local`, which was created to call `/usr/local/bin/update-issue.sh`, which updates the `/etc/issue` and `/etc/issue.net` files and delete sensitive data. The script `/etc/rc.local` has been created with the following content and the executable bit has been set. By default, FreeBSD 9 executes this script at startup via `/etc/rc.d/local`.

```
#!/bin/sh

/usr/local/bin/update-issue.sh
/bin/rm -f /var/log/pdlna.log
/bin/rm -f /tmp/pdlna.db
/bin/rm -f /var/run/pdlna.pid
```

Since the configuration file `/etc/gettytab` is already configured to use the `/etc/issue` file as a banner, no configuration to `getty` was needed.

Additionally, the OpenSSH server's configuration file (`/etc/ssh/sshd_config`) has been modified to use the `/etc/issue.net` file as a banner:

```

Starting cron.
usage: /etc/rc {start|stop|restart|status}
Starting background file system checks in 60 seconds.

Sat Aug 16 08:46:08 CEST 2014

#####
#
#               FreeBSD 9
#   FreeBSD mediaserver 9.2-RELEASE GENERIC
#
#           pDLNA v0.70.0 (2014-Aug-16)
#           http://www.pdlna.com
#
# Hostname:   mediaserver
# IP Address: 192.168.0.31
#
#####

FreeBSD/i386 (mediaserver) (ttyv0)
login:

```

Figure 8.3: Boot-up screen of pre-installed FreeBSD 9 virtual machine image

```
Banner /etc/issue.net
```

The `/usr/local/bin/update-issue.sh` script can also be found on GitHub (github.com/geuma/pDLNA-utils/blob/master/preinstalled-VMs/FreeBSD9/update-issue.sh).

Changing the timezone

In FreeBSD 9, all the available timezones are stored in the directory `/usr/share/zoneinfo`. Because of this, changing the timezone can be done via copying the corresponding timezone file to `/etc/localtime`. An example is listed in the following snippet:

```
[pdlna@mediaserver ~]$ sudo copy /usr/share/zoneinfo/EST /etc/localtime
```

Changing the keyboard layout

Changing the keyboard layout is as easy as changing the timezone. Just execute the following command as a superuser and use its menu to configure the correct keyboard layout.

```
[pdlna@mediaserver ~]$ sudo kbdmap
```

If you would like to change the keyboard layout in a persistent way, modify the file `/etc/rc.conf`.

Chapter 9

Debugging and reporting problems

This is not (yet) a real troubleshooting guide to *pDLNA*. Currently it is more a small handbook to do some general debugging and how to gather some necessary information on a running Linux operating system. You are also able to forward this gathered information to me.

9.1 Debugging

When starting *pDLNA*, the process will parse the configuration file¹ and will not start until everything is configured correctly. In some cases *pDLNA* might not be able to determine the correct *ListenInterface*, where you need to configure this information by hand. The following command starts *pDLNA*.

```
pdlna@mediaserver:~$ sudo /etc/init.d/pdlna start
```

Once *pDLNA* is running successfully, you are able to verify this by running the following two commands. The first one checks all the running processes for the *pDLNA* process, while the second one prints out the stored PID. If both PID match each other, everything should be fine.

```
pdlna@mediaserver:~$ sudo ps -ef | grep pDLNA
root      13162    1  3 09:18 pts/2    00:00:50  /usr/bin/perl ./pDLNA.pl -f
           /etc/pdlna.conf
```

```
pdlna@mediaserver:~$ sudo cat /var/run/pdlna.pid
13162
```

The following listings are based on the network configuration listed in 6.3. So, the next step to identify a lowlevel network problem of *pDLNA* will be to check if *pDLNA* is listening to the two necessary network ports. There is **port 1900 UDP** needed for the *SSDP* communication and configured *HTTPPort*² for the *DLNA* communication via HTTP. The following command checks the

¹Please see chapter 6 for more details.

²By default this port is port 8001 TCP and can be changed in the configuration file (see section 6.3.3).

network statistics and filters for the lines including the PID of the running *pDLNA* installation.

```
pdlna@mediaserver:~$ sudo netstat -taunp | grep 13162
Active Internet connections (servers and established)
Proto Recv-Q Send-Q Local Address          Foreign Address         State       PID/Program name
tcp        0      0 192.168.145.139:8001    0.0.0.0:*               LISTEN      13162/perl
udp        0      0 192.168.145.139:37302  239.255.255.250:1900    ESTABLISHED 13162/perl
udp        0      0 0.0.0.0:1900          0.0.0.0:*               53368      13162/perl
```

If your network statistics output shows, that *pDLNA* is correctly listening to **port 1900 UDP** and the configured *HTTPPort*, the network communication should be working.

IMPORTANT NOTE: *AllowedClients* is configured to the local subnet by default.

IMPORTANT NOTE: Please also check your firewall configuration.

As a simple test you can visit the WebUI (see chapter 7), which can be accessed by the following URL: `http://ListenIPAddress:HTTPPort/webui/`. If you are receiving an *HTTP Error Code 403*, your host is not configured as an *AllowedClients*. If your Browser is running in a *timeout*, there might be a problem with your configuration.

After checking the general process and network information, the next step is about increasing the *LogLevel* and configuring the necessary *LogCategory* from table 6.6. At first you need to configure *LogLevel* to the highest *LogLevel* available in table 6.5 for the most detailed log messages.

9.1.1 My device is not able to discover *pDLNA*

If your *DLNA* capable device is not able to discover *pDLNA*, please set the configuration parameter *LogCategory* to **discovery**, **httpgeneric** and restart *pDLNA*. Additionally you are able to do a packet capture with the following command:

```
pdlna@mediaserver:~$ sudo tcpdump -i ListenInterface -s 1500 \
-w capture_full.pcap
```

Please ensure to fill in the configured *ListenInterface*.

9.1.2 My media directories are not read correctly

In the case, that *pDLNA* was not able to read in your shared directories correctly, enable the *LogCategory library* in the configuration file and restart the installed version of *pDLNA*. An easy way to navigate quickly through the media library and check for problems is by using the WebUI (see chapter 7).

For a detailed look on the structure and contents of the media library, check your database.

9.1.3 My device is not able to list the directories/items shared by *pDLNA*

If browsing the shared media directories is not working properly by your *DLNA* aware devices, configure the *LogCategory* to `httpgeneric`, `httpdir`, restart *pDLNA* and do a packet capture with the following command:

```
pdlna@mediaserver:~$ sudo tcpdump -p HTTPPort -s 1500 -w capture_http.pcap
```

Please ensure to fill in the configured *HTTPPort* (by default set to 8001).

For a detailed look on the structure and contents of the media library, check your database.

9.1.4 *pDLNA* is not able to stream media items to my device

In any case, that streaming of videos, music or images is not working properly, please set the *LogCategory* parameter to `httpgeneric`, `httpstream`, restart *pDLNA* and start a packet capture with the following command:

```
pdlna@mediaserver:~$ sudo tcpdump -p HTTPPort -s 1500 -w capture_http.pcap
```

Please ensure to fill in the configured *HTTPPort* (by default set to 8001).

9.2 Reporting problems

If you are not able to fix the problem or just want me to take a closer look, please supply all mentioned information, like network statistics, packet captures, logs and so on.

In case of having a *DLNA* aware device, which is not working properly with *pDLNA* please supply a full packet capture, including the whole *SSDP* and *DLNA* packets of this specific device communicating with another digital media server (which is working properly). In this case I might be able to determine the differences and supply a new version of *pDLNA* which is supporting this device.

Chapter 10

Known Issues

10.1 PostgreSQL: NOTICE messages when initializing database

10.1.1 Description

When a PostgreSQL database is used as a backend for *pDLNA*, various NOTICE messages will appear¹. These messages are only informing about some tables or primary keys, which have been created by *pDLNA*.

The output might look like:

```
root@mediaserver:~# /etc/init.d/pdlna start
Starting pDLNA ...
NOTICE: CREATE TABLE / PRIMARY KEY will create implicit index "metadata_pkey"
        for table "metadata"
NOTICE: CREATE TABLE will create implicit sequence "items_id_seq" for serial
        column "items.id"
NOTICE: CREATE TABLE / PRIMARY KEY will create implicit index "items_pkey" for
        table "items"
NOTICE: CREATE TABLE will create implicit sequence "device_ip_id_seq" for
        serial column "device_ip.id"
NOTICE: CREATE TABLE / PRIMARY KEY will create implicit index "device_ip_pkey"
        for table "device_ip"
NOTICE: CREATE TABLE will create implicit sequence "device_bm_id_seq" for
        serial column "device_bm.id"
NOTICE: CREATE TABLE / PRIMARY KEY will create implicit index "device_bm_pkey"
        for table "device_bm"
NOTICE: CREATE TABLE will create implicit sequence "device_udn_id_seq" for
        serial column "device_udn.id"
NOTICE: CREATE TABLE / PRIMARY KEY will create implicit index
        "device_udn_pkey" for table "device_udn"
NOTICE: CREATE TABLE will create implicit sequence "device_nts_id_seq" for
        serial column "device_nts.id"
NOTICE: CREATE TABLE / PRIMARY KEY will create implicit index
        "device_nts_pkey" for table "device_nts"
NOTICE: CREATE TABLE will create implicit sequence "device_service_id_seq" for
        serial column "device_service.id"
NOTICE: CREATE TABLE / PRIMARY KEY will create implicit index
        "device_service_pkey" for table "device_service"
NOTICE: CREATE TABLE / PRIMARY KEY will create implicit index "stat_mem_pkey"
        for table "stat_mem"
```

¹<https://github.com/geuma/pDLNA/issues/28>

```
NOTICE: CREATE TABLE / PRIMARY KEY will create implicit index
"stat_items_pkey" for table "stat_items"
```

10.1.2 Workaround

At the moment, there is no workaround for this issue. Just ignore these messages, if they appear.

10.2 FreeBSD: initscript unable to completely shut down pDLNA

10.2.1 Description

On FreeBSD, there seems to be a problem shutting down *pDLNA* via the included initscript². After stopping and starting *pDLNA*, the following error message will occur:

```
[root@mediaserver ~]# /etc/rc.d/pdlna start
Starting pDLNA ...
[root@mediaserver ~]# /etc/rc.d/pdlna restart
Starting pDLNA ...
[root@mediaserver ~]# Cannot bind to Multicast socket: Address already in use
Going to terminate pDLNA/v0.63.0 on freebsd/9.0-release with FriendlyName
'pDLNA v0.63.0 on mediaserver' ...
```

10.2.2 Workaround

Since there is no fix for this issue today, this problem can be handled by a workaround. Get the process ID of the still running *pDLNA* process, kill it, remove the PID file (if any) and use the initscript afterwards again to start *pDLNA*:

```
[root@mediaserver ~]# ps | grep pDLNA
2327  0  I   0:22.46 /usr/bin/perl ./pDLNA.pl -f /etc/pdlna.conf
2651  0  R+   0:00.01 grep pDLNA
[root@mediaserver ~]# kill -9 2327
[root@mediaserver ~]# rm /var/run/pdlna.pid
[root@mediaserver ~]# /etc/rc.d/pdlna start
Starting pDLNA ...
```

²<https://github.com/geuma/pDLNA/issues/20>

Chapter 11

Fixed Issues

11.1 DirectoryListings not working when mandatory data fields not defined

IMPORTANT NOTE: This issue has been fixed with *pDLNA* in version 0.64.2.

11.1.1 Description

Directory listings are not working, when *mandatory* data fields are not defined in the XML <FILTER> tag of the browse request from a DLNA media renderer.¹.

11.1.2 Workaround

There is no workaround for this issue.

11.2 Movie::Info is still used by PDLNA::Media

IMPORTANT NOTE: This issue has been fixed with *pDLNA* in version 0.64.1.

11.2.1 Description

The `PDLNA::Media` Perl module is still using `Movie::Info` Perl module, even if it is not required any more. So *pDLNA* will not start up if the `Movie::Info` Perl module is not installed².

11.2.2 Workaround

Install the missing Perl module `Movie::Info`.

¹github.com/geuma/pDLNA/issues/24

²github.com/geuma/pDLNA/issues/23

11.3 parsing problem if media file name contains special regex characters like '(', ')', or others

IMPORTANT NOTE: This issue has been finally fixed with *pDLNA* in version 0.65.0.

11.3.1 Description

This issue has been reported on a Raspberry Pi running Linux with Perl 5.14.2 and locales configured to `de_DE.UTF-8`.

The following error appears, when files with special characters (for instance brackets) are existing, which break some regular expressions in *pDLNA*³:

```
Issuing rollback() due to DESTROY without explicit disconnect() of
DBD::SQLite::db handle dbname=/media/TREK_2/Audio/pdlna.db at ./pDLNA.pl
line 63.
Thread 1 terminated abnormally: Unmatched ) in regex; marked by <-- HERE in
m/^18-This Live I) <-- HERE 'm Living.mp3$/ at PDLNA/ContentLibrary.pm
line 152.
```

11.3.2 Workaround

There is no workaround for this issue. Or would you like to rename your files?

11.4 Use of uninitialized value \$request_line in string ne at /PDLNA/HTTPServer.pm line xxx.

IMPORTANT NOTE: This issue has been fixed with *pDLNA* in version 0.62.0.

11.4.1 Description

Apparently *pDLNA* sometimes starts to print, for unknown reasons, the following warning message to `STDOUT` infinitely⁴:

```
Use of uninitialized value $request_line in string ne at /PDLNA/HTTPServer.pm
line xxx.
```

11.4.2 Workaround

Since, this message is only a warning message, it does not affect the functionality of *pDLNA*. But actually, it increases the system load. A restart of *pDLNA* will fix the problem temporarily, but the issue might take place again.

³github.com/geuma/pDLNA/issues/21

⁴github.com/geuma/pDLNA/issues/13

11.5 AllowedClients auto detection on FreeBSD is defect

IMPORTANT NOTE: This issue has been fixed with *pDLNA* in version 0.61.0.

11.5.1 Description

Apparently *pDLNA* dies with the following error message on *FreeBSD* if *AllowedClients* auto detection is enabled⁵:

```
AllowedClients(ip_address_sv) at PDLNA/Config.pm line xxx.
```

This seems to be a problem with the usage of `AllowedClients(ip_address_sv)` on *FreeBSD*.

11.5.2 Workaround

As a workaround you are able to define the *AllowedClients* configuration parameter in the configuration file. For detailed information see section 6.3.4.

⁵github.com/geuma/pDLNA/issues/4